




Automatic tyre changer with pneumatic tilting column

Pneumatically-operated tilting arm support column with high torsional rigidity, can be tilted in any working position.

Telescopic (squared) HORIZONTAL ARM for quicker positioning of the head in relation to the rim

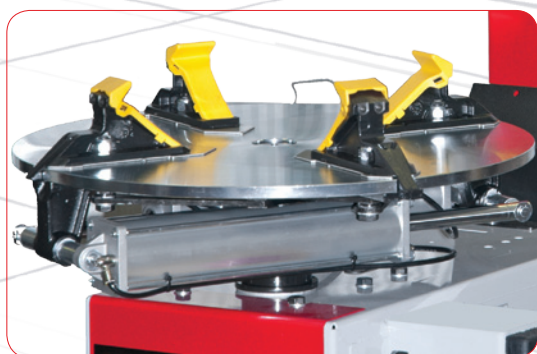

TURNTABLE WITH TWO PNEUMATIC CYLINDERS

able to safely clamp any type of rim.

SLIDING SUPPORTS with interchangeable clamping centres. Higher cast clamps for improved rim clamping from inside and outside.

TECHNICAL DATA

Inside clamping capacity	13" ÷ 23"
Outside clamping capacity	10" ÷ 20"
Maximum tyre diameter	1100 mm (43")
Maximum tyre width	305 mm (12")
Rotation torque	1200 Nm
Rotation speed	8 rpm
Height above the ground	665 mm
Bead breaker	
Maximum opening	380 mm
Shoe force	15.500 N
Power supply	230/400V - 3Ph - 0,75 kW
Operating pressure	10 bar
Weight	250 kg
Dimensions l x d x h	1060 x 1570 x 1730 mm


STANDARD ACCESSORIES



RECOMMENDED ACCESSORIES



8-11100105 6 plastic protections for breaker blade



8-11100109 12 front plastic outside clamp protections



Bead lever



8-11100104 6 plastic protections for bead lever