




24"



14"



Automatic tyre changer with pneumatic tilting column.

Available in DV version and with T.I. inflation system and alloy spot rims (on request)




- **Pneumatically-operated tilting arm support column** with high torsional rigidity, can be tilted in any working position
- Telescopic (hexagonal) **horizontal arm** for quicker positioning of the head in relation to the rim
- **Simultaneous pneumatic locking** of the horizontal arm and head carrier vertical arm with automatic positioning of the latter to ideal working position.

TECHNICAL DATA

Turntable	
Inside clamping capacity	13" ÷ 26"
Outside clamping capacity	10" ÷ 24"
Maximum tyre diameter	1100 mm
Maximum tyre width	355 mm (14")
Rotation torque	1200 Nm
Rotation speed	8 rpm-13rpm (per 2V)
Height above the ground	665 mm
Bead breaker	
Maximum opening	380 mm
Shoe force	15.500 N
Power supply	All Power supply
Operating pressure	10 bar
Weight	255 kg
Dimensions l x d x h	1090 x 1700 x 1835 mm


STANDARD ACCESSORIES

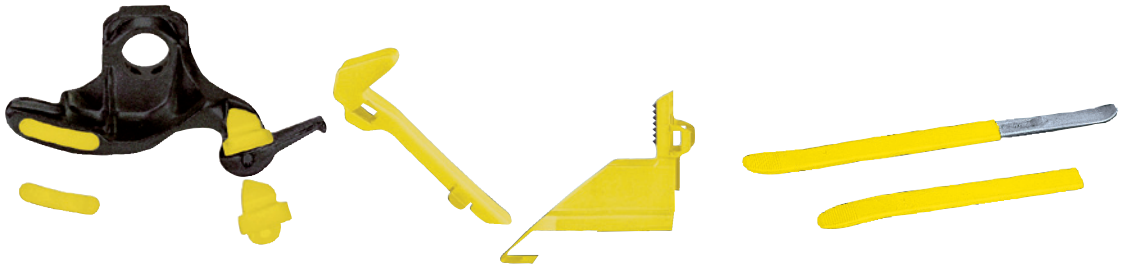


ACCESSORIES ON REQUEST



8-11100105 6 plastic protections for breaker blade

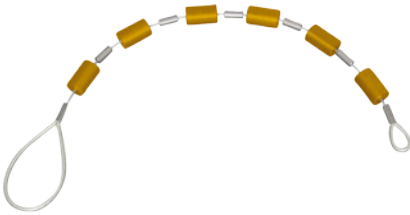

8-11400290 PTR Roller bead presser



8-11120014 REP 3 rim edge plastic protections



801458663 Plastic protections for bead breaker pad