





EM9280

CompactLine



Balancing with monitor, compact and essential with professional performances

Electronic input of wheel diameter and distance with FSP function which automatically activates the balancing programmes, avoiding keypad selection.




Three modes to position the adhesive weights: with the weight holder clip (optional), with the 6 o'clock laser indicator (optional) or manually at 12 o'clock.

TECHNICAL DATA

Power supply voltage	115/230 V - 1ph - 50/60 Hz
Shaft diameter	40 mm
Spinning speed	90 ÷ 130 rpm
Unbalance measurement accuracy	1 g
Average measurement time	7 s
Rim width setting range	1,5" ÷ 20"
Rim diameter setting range	1" ÷ 35"
Rim diameter measurement range	10" ÷ 28"
Maximum wheel width (with guard)	600 mm
Maximum wheel diameter (with guard)	1117 mm
Maximum wheel/machine distance	275 mm
Maximum wheel weight (ground fastening)	75 Kg
Maximum dimensions l x d x h	1292 x 1503 x 1669

DOTAZIONE / STANDARD EQUIPMENT

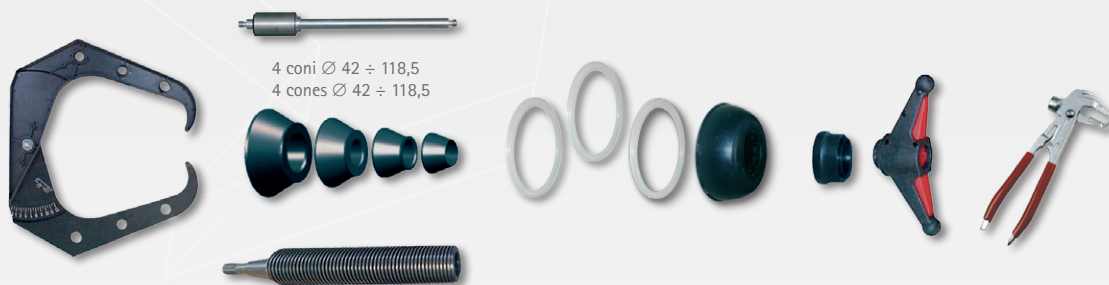

ACCESSORIES ON REQUEST




8-21100235

19" widescreen LCD monitor



8-21100238

LL kit Inside wheel LED light and LASER pointer kit



8-21100158

PL50 Base for balancing wheels up to 50 kg without fastening the machine to the ground.




8-21100091

FRU Universal self-centring flange forwheels without central hole



8-21100159

CLIP STD ALU weight-holder terminal




8-21100230

TT-0 "Weightless effect" wheel lifter



8-21100141

DX/CBF Centring accessory for van and off-road wheels with central hole with Ø 117÷173 mm



8-21100232

AWD automatic sensor