




 **CORGI**

EM9380 XLine



**Electronic wheel balancers
for car, van and motorcycle wheels**

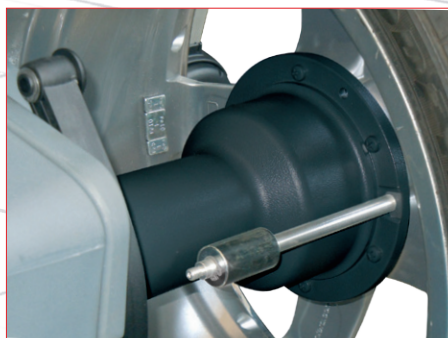

Quickly and intuitive sensitivity calibration. The ne sample weight supplied with the machine is simply applied directly to the spin unit, ensuring maximum precision and eliminating operator error.


TECHNICAL DATA

Power supply voltage	115/230 V - 1ph - 50/60 Hz
Pneumatic air supply pressure	6/8 bar
Shaft diameter	40 mm
Spinning speed	90 ÷ 130 rpm
Unbalance measurement accuracy	1 g
Average measurement time	7 s
Rim width setting range	1,5" ÷ 20"
Rim diameter setting range	1" ÷ 35"
Rim diameter measurement range	11" ÷ 28"
Maximum wheel width (with guard)	600 mm
Maximum wheel diameter (with guard)	1117 mm
Maximum wheel/machine distance	275 mm
Maximum wheel weight (ground fastening)	75 Kg
Maximum dimensions l x d x h	1597 x 1122 x 1669

STANDARD ACCESSORIES



EM9380C

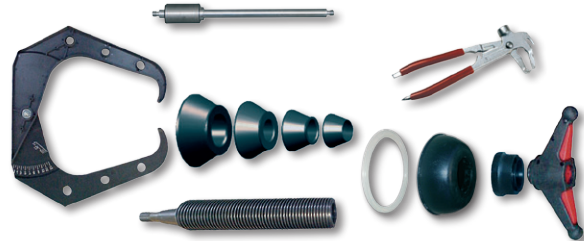

EM9380

ACCESSORIES ON REQUEST



8-21100082

SBC Set of six bushes for reverse side centring



8-21100091

FRU Universal self-centring flange for wheels with or without central hole, hole \varnothing min. 90 max. 210 mm



8-21100092

BVFF Set of five bushes for precise centring on FRU flange



8-21100159

CLIP STD ALU weight-holder terminal



8-21100230

TT-0 "Weightless effect" wheel lifter




8-21100145

FPF - 2 BMW Universal flange kit for wheels with central hole




8-21100141

DX/CBF Centring accessory for van and off-road wheels with central hole with \varnothing 117÷173 mm



8-21100234

LCD Monitor 19 / 22"



8-21100232

AWD automatic sensor