



SP2300 WDK

Universal multifunctional device for facilitating tyre mounting and demounting
Two versions are available:

- **SP2300 Standard**, consisting of three integrated operating units capable of working on all types of tyre - including ultra low profile and run flat tyres - and light alloy wheel rims.
- **SP2300 WDK**, which differs from the standard version in having a bead depressor disc instead of a bead depressor roller.

TECHNICAL DATA


Working range	up to 26"
Maximum wheel height	14"
Press force on tools	7000 N
Operating pressure	10 bar
Weight (standard and WDK version)	53 kg
Overall dimensions l x h	1368 x 1585



ROTATING BEAD DEPRESSOR.

Follows the tyre radially during mounting and demounting and depresses the bead with a roller or, in the case of the WDK version, a disc

CONFIGURATION TO BE ORDERED

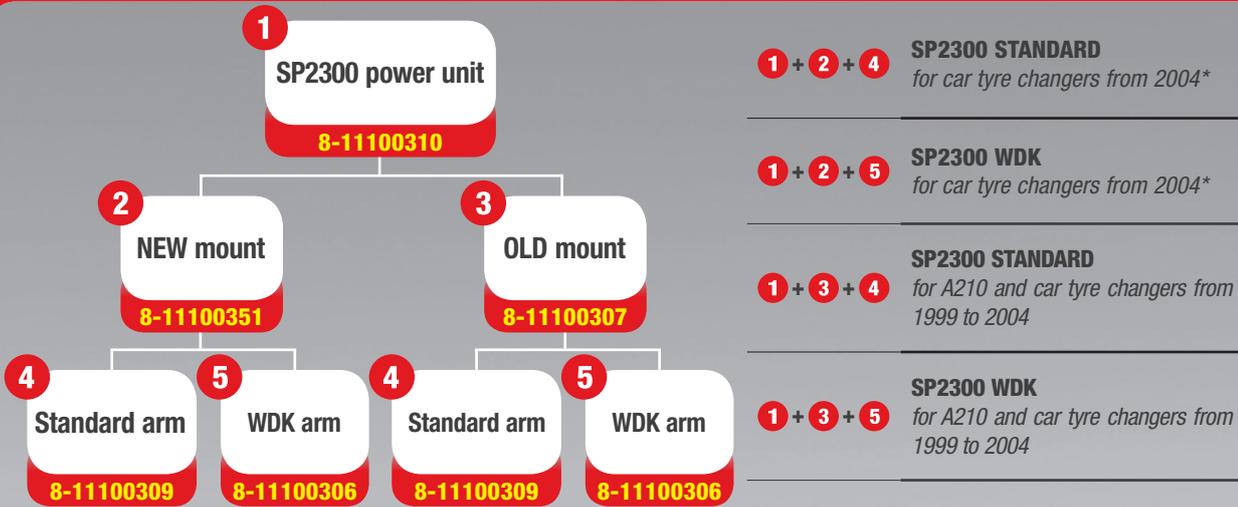

* A2025LL - A2025 - A2024 - A2020 - A2015 - A2005

RECOMMENDED ACCESSORIES



8-11100311 Rim locked onto clamp with RIM PRESSER CONE.

