




24"



14"



Automatic tyre changer with pneumatic tilting column with T.I. bead insertion and inflation system and two speed motor.




- The bead breaker installed on the machine as standard is fitted with a new component which allows the length of the fixed arm shoe to be extended. This feature is extremely useful and gives optimal results when working on large wheels and SUV wheels.
- It also ensures that the bead breaker shoe is always in exactly the right position in relation to the wheel, ruling out the risk of damage to the tyre and/or rim. This function is faster and safer.

## TECHNICAL DATA

<b>Turntable</b>	
Inside clamping capacity	13" ÷ 26"
Outside clamping capacity	10" ÷ 24"
Maximum tyre diameter	1100 mm
Maximum tyre width	360 mm (14")
Rotation torque	1300 Nm
Rotation speed	8 ÷ 26 rpm-
Height above the ground	665 mm
<b>Bead breaker</b>	
Maximum opening	380 mm
Shoe force	15.500 N
Support	Telescopic
Power supply	230V-1Ph-0,75 kW
Operating pressure	10 bar
Weight	259 kg
Dimensions l x d x h	1090 x 1700 x 1835 mm


## STANDARD ACCESSORIES

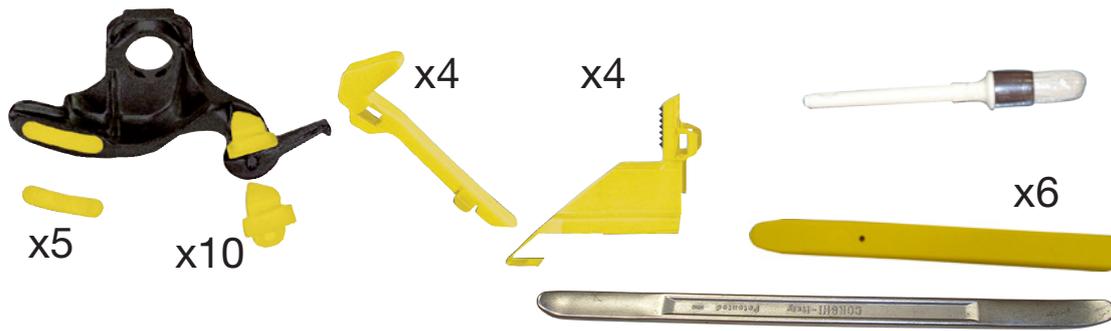

## RECOMMENDED ACCESSORIES



8-11100105 6 plastic protections for breaker blade

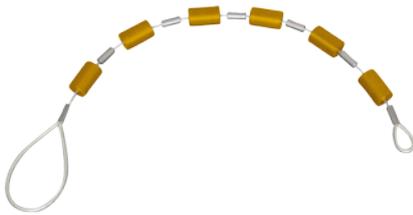

8-11400290 PTR Roller bead presser



8-11120014 REP 3 rim edge plastic protections



8-11100091 13"-15" bead ring pressing tool

