


Lift sturdy, steady and practical to use

The ERCO 25 TP lift is sturdy, steady and practical to use. Designed to improve conditions for work on the wheels, nowadays it has become an essential tool for tyre professionals and car repair garages in search of a versatile, safe lift for any type of cars, vans and off-road vehicles. The lifting strength (2500 kg) is generated by an air spring that allows high capacity with a limited pressure power (maximum capacity achievable with just 7 BAR). The perfectly symmetrical H-shaped structure allows lifting from both sides of the lift. The control pedals feature an emergency button and an additional air inlet. Mobile access ramps allow finishing balancing operations.

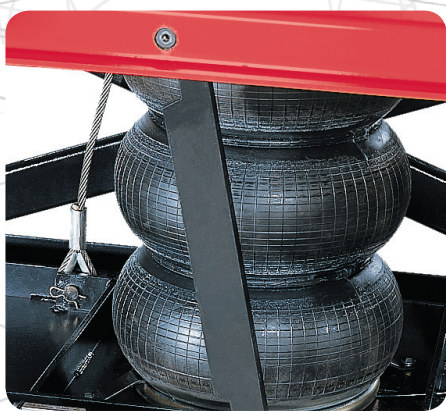

The two-stage configuration of the ramps allows lifting any vehicle, sports ones with low spoiler included, without touching the platform.

TECHNICAL DATA

Max. capacity	2500 kg
Minimum height	115 mm
Maximum height	500 mm
Supply pressure	7 bar
Weight	390 Kg
Maximum width	2240 mm
Maximum length with ramps	3520 mm
Noise level in working conditions	<70 dB(A) ± 3 dB(A)

COMPULSORY ACCESSORIES

IMAGE NOT AVAILABLE

804240739


Double access ramps

IMAGE NOT AVAILABLE

804240740

Single access ramps

ACCESSORIES ON REQUEST



804457645

Set of revolving arms

