





EM9350 XLine

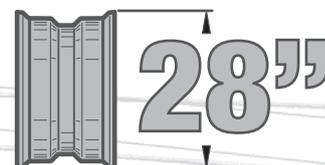

High performance digital wheel balancer with latest generation software solutions.

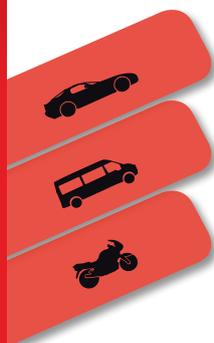


LED spotlight to light-up the work area and make it easier to clean the rim, check the wheel and apply weights. The adhesive weights can be positioned extremely rapidly using the laser pointer at 6 o'clock.

TECHNICAL DATA

Power supply voltage	115/230 V - 1ph - 50/60 Hz
Pneumatic air supply pressure	6/8 bar
Shaft diameter	40 mm
Spinning speed	90 ÷ 130 rpm
Unbalance measurement accuracy	1 g
Average measurement time	7 s
Rim width setting range	1,5" ÷ 20"
Rim diameter setting range	1" ÷ 35"
Rim diameter measurement range	11" ÷ 28"
Maximum wheel width (with guard)	600 mm
Maximum wheel diameter (with guard)	1117 mm
Maximum wheel/machine distance	275 mm
Maximum wheel weight (ground fastening)	75 Kg
Maximum dimensions l x d x h	1597 x 1122 x 1669

STANDARD ACCESSORIES

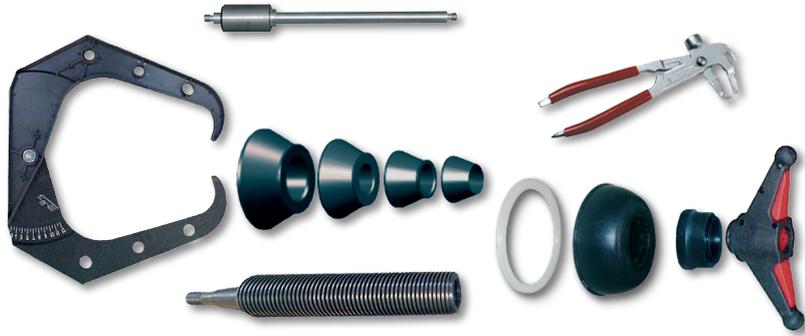

ACCESSORIES ON REQUEST



8-21100082

SBC Set of six bushes for reverse side centring



8-21100091

FRU Universal self-centring flange for wheels with or without central hole, hole \varnothing min. 90 max. 210 mm



8-21100092

BVFF Set of five bushes for precise centring on FRU flange



8-21100159

CLIP STD ALU weight-holder terminal



8-21100230

TT-0 "Weightless effect" wheel lifter




8-21100145

FPF - 2 BMW Universal flange kit for wheels with central hole



8-21100141

DX/CBF Centring accessory for van and off-road wheels with central hole with \varnothing 117÷173 mm



8-21100232

AWD automatic sensor