




HD 900



Electrohydraulic tyre changer for trucks, buses, tractors and earth moving equipment with groove or elastic ring type rim wheels and with tubeless or inner tube type tyres.

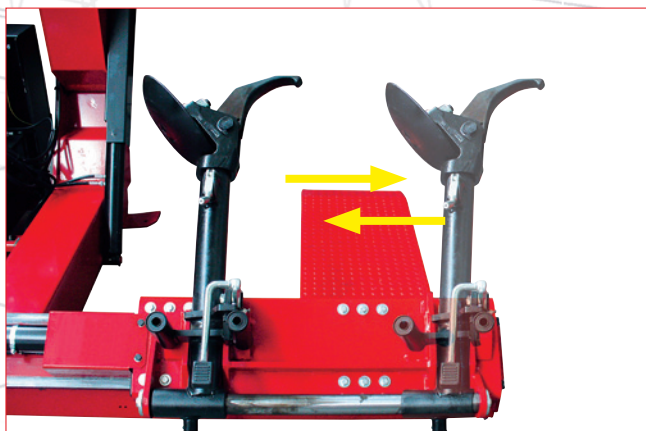

Carriage with hydraulic left-right translation and tool arm with safety lock system.
HD 900 can work with wheels weighing up to 1000 kg.

Turntable with two-speed rotation both clockwise and anticlockwise.

TECHNICAL DATA

Max wheel width	1065 mm
Max. wheel diameter	2300 mm
Chucking device capacity	14" ÷ 46" (PA = 56")
Hydraulic unit motor	1,5 kW
2 speed gear box motor	1,3 ÷ 1,8 kW
Max. wheel lifter cylinder capacity	1600 kg
Max. wheel weight	1000 kg
Voltage	230/400 V 3ph - 50/60 Hz
Weight	762 kg


STANDARD ACCESSORIES



ACCESSORIES ON REQUEST



2306040 Tubeless tyre roller for truck and bus wheels



8-12100158 **GL** New special clamps with plastic inserts for alloy rims



8-12100155 **Pa** set of 4 self-centring extensions



8-12100007 Locking adapter for alloy wheels Ø161 mm

8-12100005 Locking adapter for alloy wheels Ø164 mm

8-12100006 Locking adapter for alloy wheels Ø176 mm

8-12100008 Locking adapter for alloy wheels Ø 202 mm

8-12300001 Locking adapter for alloy wheels Ø 220 mm

8-12100009 Locking adapter for alloy wheels Ø 221 mm

8-12100010 Locking adapter for alloy wheels Ø 281 mm



0-12100701 **DV120** Bead pressing device