


**Automatic tyre changer for cars, lightweight transport vehicles and motor vehicles.**

Available with traditional inflation or T.I. bead insertion and inflation system

- Air operating tilting of column
- Mechanical balancing of tool-holder shaft
- Simultaneously tool alignment with clamping by simply pressing a button
- "Square" self-centering chuck with rotation in 1 speed in both directions
- Thermoformate carter for small objects at the base of the column

## TECHNICAL DATA


Power supply voltage	115/230 V - 1ph - 50/60 Hz 230/400V - 3Ph - 50-60Hz
Inside clamping capacity	12" ÷ 24"
Outside clamping capacity	10" ÷ 22"
Bead-breaking power (blade)	1200 N
Bead-breaking opening	400 mm
Max. wheel diameter	1140 mm (44,5")
Max. wheel width	350 mm (14")
Working pressure	8 ÷ 10 bar
Max. chuck rotation torque	1100 Nm
Chuck rotation speed	6 r.p.m.
Motor power	0,75 kW
Weight machine	255 kg
Noise level when running	<70dB (A)
Maximum dimensions (l x d x h)	1350 x 1850 x 2040 mm

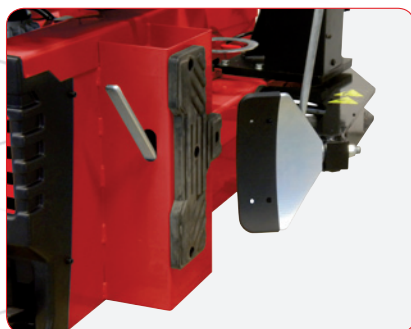

**BEAD BREAKING UNIT** with pneumatic double acting cylinder in stainless steel



**TELESCOPIC HORIZONTAL ARM**  
for rapid positioning of the head in relation to the rim.  
Tool Head with interchangeable plastic parts to protect rims.

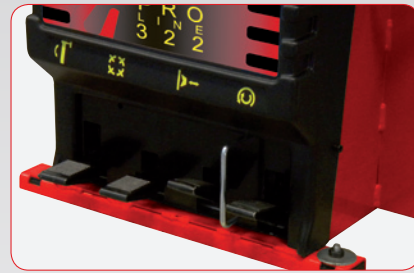

**ERGONOMIC PEDALS** made of aluminium.



**TURNTABLE** with two pneumatic cylinders capable of clamping any types of rim securely.

**STANDARD ACCESSORIES**


- Filter-pressure reducer unit
- Tyre lever

**RECOMMENDED ACCESSORIES**



8-11100343

HELPER 4FD. Universal multifunctional device for facilitating tyre mounting and demounting.



801258650

Set of 4 adapters for 15" - 23" for motorcycle rims



801263517

Set of 4 adapters for 8" - 24" rims

The manufacturer reserves the right to modify the features of its products at any time - Ed. 06-2015

