



EXACT 7 FORMULA




Wheel aligner for **CAR AND VAN**, portable version



COMPATIBLE WITH



The wheel aligner is compatible with the new PROADAS universal system used for the calibration of driver assistance systems on new generation vehicles.

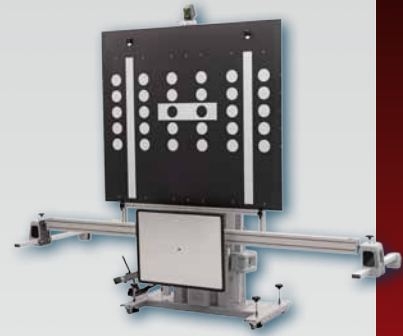

Using the wheel aligner sensors mounted on the PROADAS system, the system for calibrating the camera and radar on board the vehicle can be aligned precisely and quickly. Manufacturers recommend calibrating ADAS systems after aligning the vehicle. For more information visit the PROADAS product section on our website.

EXACT 7 FORMULA is a professional 8-sensor wheel aligner for CAR AND VAN, portable version.

Sensor head with 2 high-resolution cameras, electronic inclinometer and level.

Wireless data transmission through 2.4-GHz industrial radio devices, rechargeable commercial AA batteries with charger. Very compact and lightweight, it features oversize boom for large wheels.

Low sensitivity to light noise makes it suitable for high ambient light environments.

Sensor head features one-piece aluminium casting body for high precision!



SOFTWARE

Corghi wheel alignment software EXACT PLUS.

Routout compensation may be push-pull or with lifted wheels, database with over 40,000 vehicles, setup screens with animated cursors and colour indications enable operator to work at a distance, printout with graphics.



Live caster and kingpin inclination (KPI) measurement and adjustment. Ready for operation with Cal One-Touch® (steering sensor calibration), Aligner OnLine.

STANDARD EQUIPMENT

- Carrying case • 4 radio sensor heads with batteries and charging system • Radio module for central unit and hardlock • DVD with truck and car software and Operating Instructions



UPON REQUEST

- Wheeled cabinet • Wheel clamps with self-centring mounting system, quick-fit style • Monitor, printer and mouse • Steering clamp and pedal depressor • Emergency cables • Power supply unit to charge batteries with the PC off • PC with Windows operating system, several languages

TECHNICAL DATA

Total toa	Half toe	Camber	Caster	King pin	Set back	Thrust angle	Dimensions (width x depth x height)
± 20°	± 10°	± 10°	± 30°	± 30°	± 10°	± 8°	840x115x280 mm



NEXION SPA - www.corgi.com - info@corgi.com



To protect the planet and reduce paper usage, our catalogues are viewable online at the website www.corgi.com. Printing responsibly contributes to saving the environment. The manufacturer reserves the right to modify the features of its products at any time.

Code DPG000984B 06/2020