


Electro-hydraulic two post lifts.

Possibility of installation in symmetrical or asymmetric version.

Self-alignment with automatic positioning.

Standard height of two-post connection: 4,050 mm

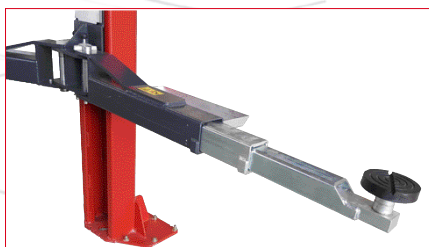

4 three-section symmetric arms.

Available versions (with optional column extension set):

V: Specific for vans (Height of two-post connection: 4,620 mm)

XV: Specific for vans and very high vehicles, extra-above version (Height of two-post connection: 5,220 mm).

All models supplied with:


- ✓ Realignment of the two carriages using metal cables that guarantee excellent synchronisation.
- ✓ Anticrushing safety bar as standard.
- ✓ Two set of extension pads.

TECHNICAL DATA


Lift capacity	4500 kg
Lifting time	45 s
Three phase motor	400/230V - 3kW 3Ph - 50/60Hz
Single phase motor	230V - 3kW 1Ph - 50/60Hz
Max. lifting height	2080 mm
Lift minimum height	100 mm
Height connection	4050 / 4620 / 5220 mm



Electro magnet safety release 24V

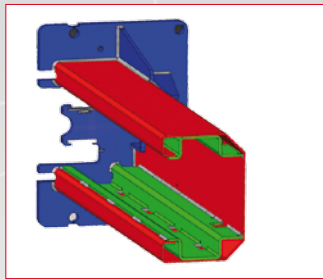


Internally reinforced column structure

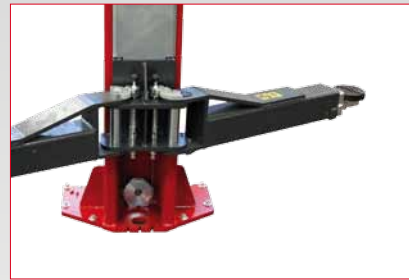

Toothed sector arm rotation stop system

DIMENSIONS

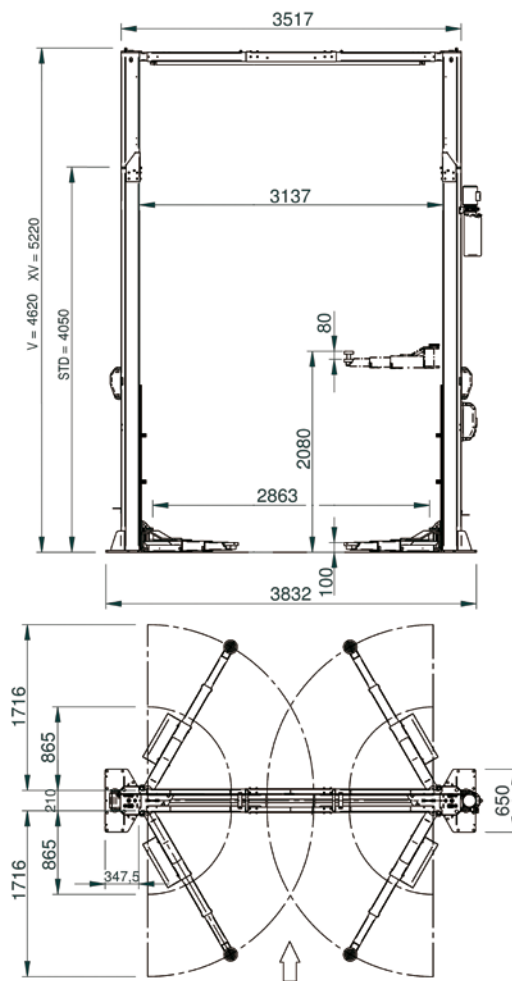

RECOMMENDED ACCESSORIES

- Set of masonry bolts (compulsory)
- Emergency hand pump
- 570 mm column extension set
- 1170 mm column extension set

