


Automatic tyre changer for tyre size up to 26".

New, compact tyre changer that is fast and easy to use. Fully hydraulic.

The tyre changer was expressly studied to take up the least amount of space and to be able to be positioned anywhere inside the garage. Its reduced dimensions even allow it to be installed on a truck for mobile service.

The 2 hydraulic-powered trolleys (1-2), the chuck holder and the tool carriage, allow the wheel to be moved rapidly. This always puts it in the best condition to be demounted and mounted.

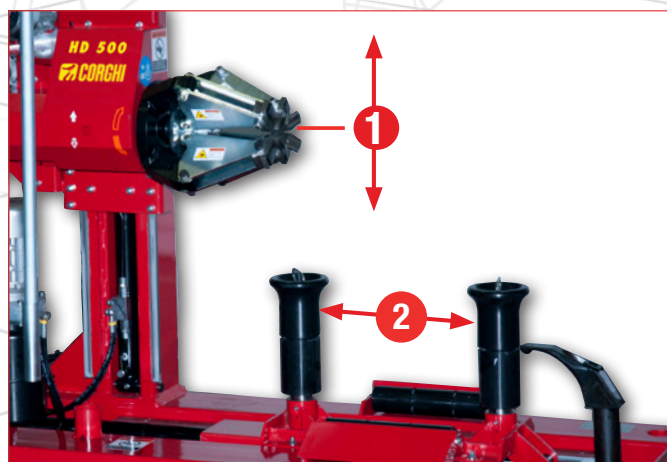


The turntable is equipped with a safety device that prevents accidental closure. The cylinder that lifts the turntable trolley has a safety valve that prevents the trolley and the tyre from falling accidentally. A pressure-relief valve guarantees that the tyre changer functions at a high-performance level.

TECHNICAL DATA

Max wheel width	695 mm
Max. wheel diameter	1400 mm
Hydraulic control unit motor	0,75 kW (3Ph) 1.3 kW (1Ph)
Turntable motor	0,75 kW (3Ph) 1.1 kW (1Ph)
Max. wheel weight	700 kg
Bead breaking force	1400 N
Voltage	400/230V - 3Ph - 50/60Hz 230V - 1Ph - 50/60Hz
Machine weight	500 kg

STANDARD ACCESSORIES

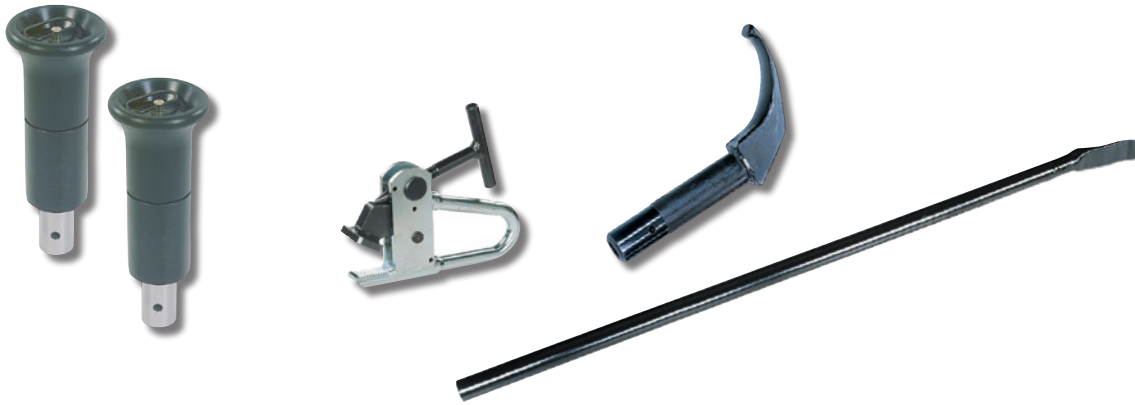

RECOMMENDED ACCESSORIES



8-12100176 **PA26** Turntable extensions for flangeless rims



2016908 **BBD** Bead breaker disc



801227195 **PL** Alloy rim clamp



801254494 Set of 4 scratch protectors for alloy rims